




S-250 HS

100% hydraulic Snow Blower

(3500 psi or 6000 psi versions available)

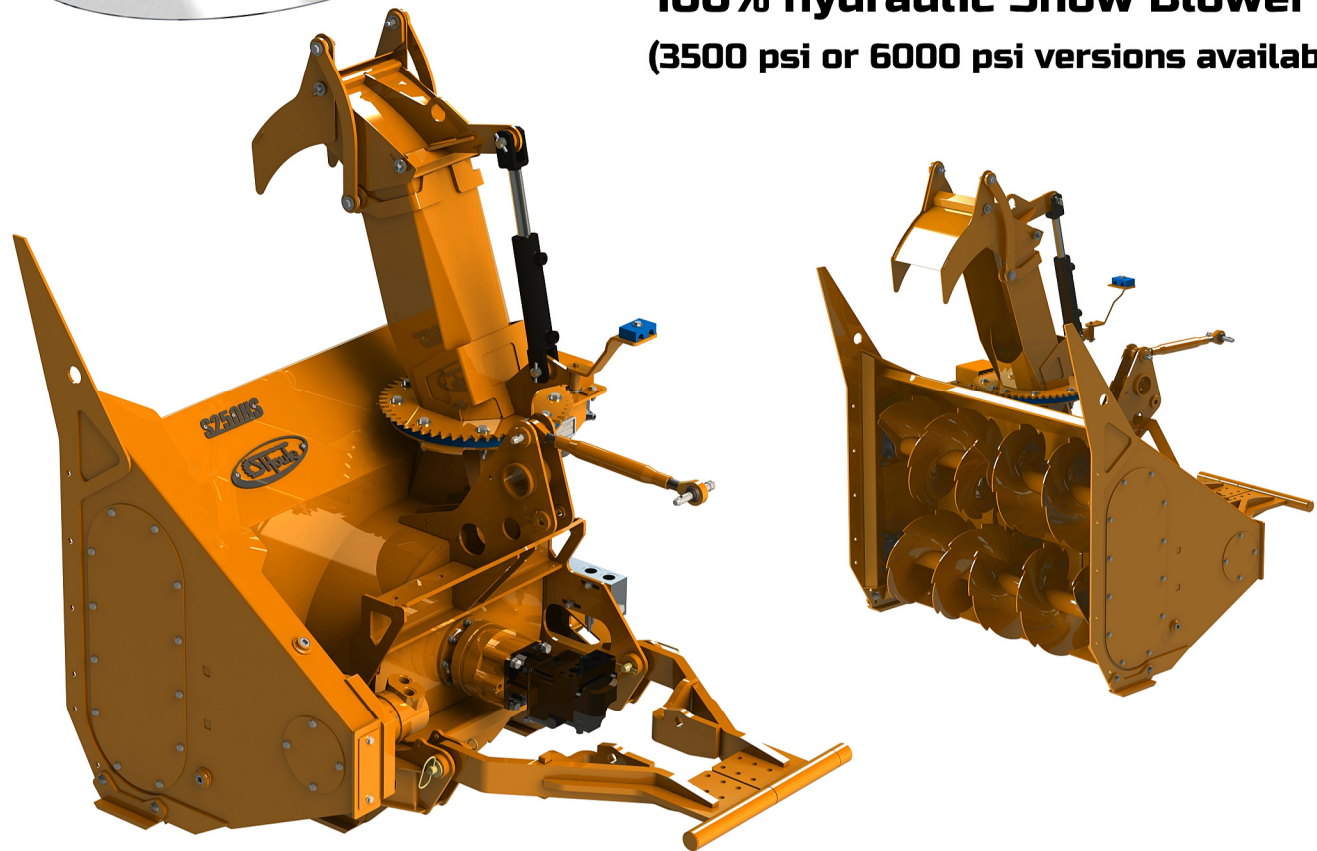

SPECIFICATIONS		STANDARD EQUIPMENT
- Cutting width:	1283 mm (50 1/2 in.)	- Ball bearing mounted augers - Sealed chain case in oil bath - Renold chain #50-2 - Excentric hain tensioner - Hydraulic rotation for chute - UHMV anti-friction chute support - Lateral skid shoes made of CHT-400 steel - Cameleon or Skid Steer attachment
- Cutting height:	953 mm (37 1/2 in.)	
- Recommended HP:	60 to 100 HP	
- Impeller RPM:	600 RPM	
- Impeller diameter:	610 mm (24 in.)	
- Impeller blades:	4 blades	
- Drum depth:	229 mm (9 in.)	
- Augers diameter:	407 mm (16 in.)	
- Chute operation:	280 degrees	
- Maximum pressure for impeller motor:	3500 psi or 6000 psi	
- Maximum pressure for auger motor, chute and cylinder:	3000 psi	OPTIONAL EQUIPMENT - Telescoping chute with variable height from 2743 mm (108 in.) to 3556 mm (140 in.) - Extension steering vanes of 102 mm (4 in.) and 203 mm (8 in.) - Bottom cutting edge made of UHMW - Skid shoes made of UHMW
- Flow min:	25 GPM	
- Flow max:	30 GPM	



S-250 HS

Souffleur 100% hydraulique

Dimensions

